
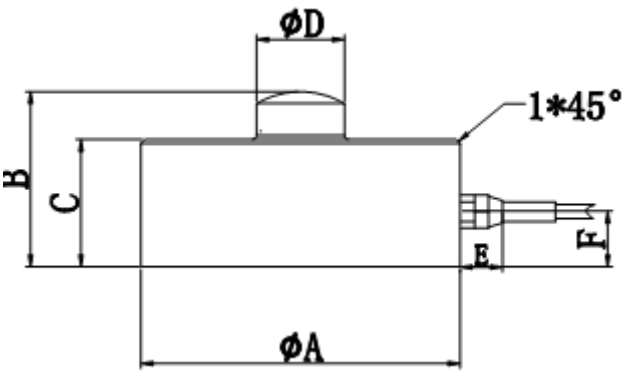


LH133

特点和用途：
膜盒式合金钢制称重传感器。
用于汽车衡、台秤、地中衡、工业称重系统。

Features & Applications:
Tool steel construction, low profile compression design, easy to apply.
Used for electronic truck scale, ground scale, hopper scale and other weighing system.



量程(capacity) t	尺寸(size) mm			
	0.5 ~10t	15 ~ 20t	30t	50 ~ 100t
ØA	80	100	125	165
B	44	48	54	80
C	32	36	40	62
D	22	28	35	50
E	14	14	14	26
F	12	12	12	14

主要技术参数(Specification)			
输出灵敏度(Rated output)	2.0 ± 1% mV / V	绝缘电阻(Insulation)	≥5000M Ω /100VDC
	3.0 ± 1% mV / V		
零点输出(Zero balance)	± 2 % F.S.	使用电压 (Recommended excitation)	10V
非线性(Non-linearity)	0.03 % F.S.	最大使用电压 (Maximum excitation)	15 V
滞后(Hysteresis)	0.03 % F.S.	温度补偿范围 (Compensated temperature range)	- 10 ~ 50 °C
重复性(Repeatability)	0.03 % F.S.	工作温度范围 (Operation temperature range)	- 20 ~ 60°C
蠕变（30分钟） Creep(30min)	0.05 % F.S.	安全超载(Safe overload)	150% F.S.
温度灵敏度漂移 (Temperature effect on output)	0.03 % F.S. / 10°C	极限超载(Ultimate overload)	200 % F.S.
零点温度漂移 (Temperature effect on zero)	0.03 % F.S. / 10°C	电缆线尺寸(Cable size)	Ø5 × 6000 mm
输入电阻(Input impedance)	385 ± 10(700 ± 10) Ω	台面尺寸(Platform size)	
输出电阻(Output impedance)	350 ± 3(700 ± 3) Ω	防护等级 (Protection Class)	IP67
连接方式Cable Color Code		Input: Red(+) Black(-); Output: Green(+) White(-); 输入: 红 (+) 黑 (-); 输出: 绿 (+) 白 (-)	